

TARALAY® EMOTION™



Gerflor[®]
theflooringgroup



EMOTION WOOD


Size : 2 x 20 m x 2.0 mm
Wearlayer : 0.55 mm



0402 Light-Chinon



6.6 cm

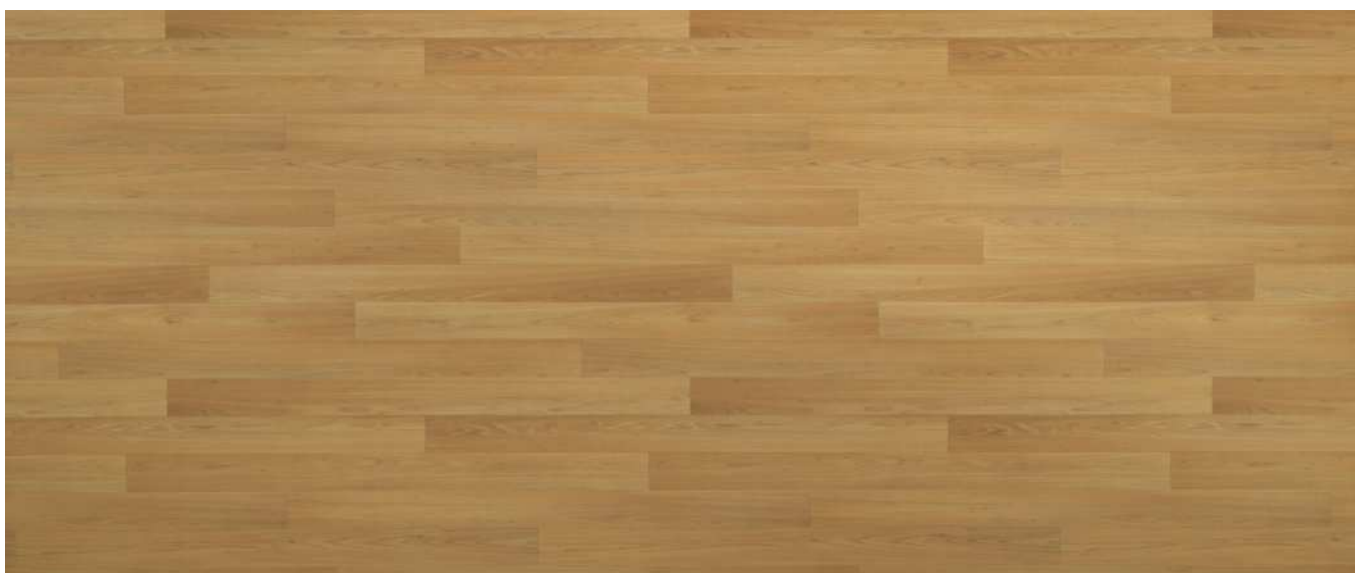

0503 Honey-Fontenay



10 cm



0505 Brown-Fontenay



10 cm



EMOTION WOOD

Size : 2 x 20 m x 2.0 mm
Wearlayer : 0.55 mm



1147 Light Beige-Albion

 20 cm



1149 Light Grey-Albion

 20 cm



1151 Deep Grey-Albion

 20 cm



TARALAY® EMOTION™



0402



1147



0811



0503



1149



0804



0505



1151



0801



0505



1151



1124

EMOTION PANAME

Size : 2 x 20 m x 2.0 mm
Wearlayer : 0.55 mm



0811 Calaité



0804 Slate



0801 Sable



1124 Sapphire



TARALAY® EMOTION™ is a multilayered compact vinyl floor covering, available in 2m width sheet. The product comprises a printed design protected by a transparent wear layer, and the compact backing with reinforced layer resists static and dynamic perforation under rolling loads and provides excellent dimensional stability.

TARALAY® EMOTION™ is treated with ProtecSol® surface treatment with excellent resistance to scratching, scuffing & easy cleaning. It has no DOP, no heavy-metal, no benzene, no formaldehyde & 100% compliant with REACH, which is friendly to health and environment, recommended for high traffic area in education, office, retail, hospital and institutional buildings.

TARALAY® EMOTION™	WOOD PANAME		
DESCRIPTION			
Total thickness	ISO 24346 (EN 428)	mm	2.0
Wearlayer thickness	ISO 24340 (EN 429)	mm	0.55
Weight	ISO 23997 (EN 430)	g/m²	2900
Width of sheet	ISO 24341 (EN 426)	cm	200
Length of sheet	ISO 24341 (EN 426)	lm	20
CLASSIFICATION			
Norm Product specification	-	-	ISO 10582 (EN 649)
European classification	ISO 10874 (EN 685)	class	33 - 42
Fire rating	EN 13 501-1	class	Bfl - s1
Static electrical propensity	EN 1815	kV	<2
Slip resistance wet	DIN 51 130	class	R9
PERFORMANCES			
Type binder content	ISO 10582	type	1
Dimensional stability	ISO 23999 (EN 434)	%	≤ 0.4
Residual indentation	ISO 24343-1 (EN 433)	mm	≤ 0.1
Castor chair test	ISO 4918 (EN 425)	-	OK
Thermal conductivity	ISO 10456 (EN 12524)	W/ (m.K)	0.25
Colour fastness	ISO 105 - B02	degree	≥ 6
Chemical product resistance	ISO 26987 (EN 423)	-	OK
Surface treatment	-	-	ProtecSol®
Anti-bacterial activity (E.coli-S.aureus-MRSA) ⁽¹⁾	JIS Z 2801	-	>99% inhibits growth
Antiviral activity (human coronavirus 229E)	ISO 21702	-	99.7% after 5h
ENVIRONMENT / INDOOR AIR QUALITY			
TVOC after 28 days	ISO 16000 - 6	µgm³	< 100
Certification	-	-	Floorscore®
CE MARKING			
	EN 14041	-	

(1) The implementation of an effective cleaning regime is the most important defence against infections.

INSTALLATION

Installation should be carried out in accordance with local standards. Subfloor should be smooth, hard, clean and dry prior to laying. Where applicable the subfloor must incorporate an effective Damp Proof Membrane. The material must be allowed to acclimatize 24 hours before installation in a room temperature of between 18-24°C. All seams must be hot welded using Gerflor® matching welding rod.

MAINTENANCE

Maintenance should be carried out regularly to retain in the appearance and durability of the floor. The floorcovering should be maintained with regular sweeping and damp mopping using a neutral cleanser. More intense cleaning should be carried out using a fine spray cleaning pad under a floor machine, or for larger areas combined machine cleaning.

TARALAY® EMOTION™ , ACTIONS SPEAK LOUDER THAN WORDS

