



064-023-2639
Environmentally
Preferred Flooring


NEW

ANTIMICROBIAL FLOORING
HABITAT[®] PLUS
by **CLICKPRO[®]**



+ Antimicrobial + Commercial Wear + Double Protect + Natural Sensation + Wide Plank

Plank 9" x 48" x 6 mm
Size: 228 x 1220 x 6 mm

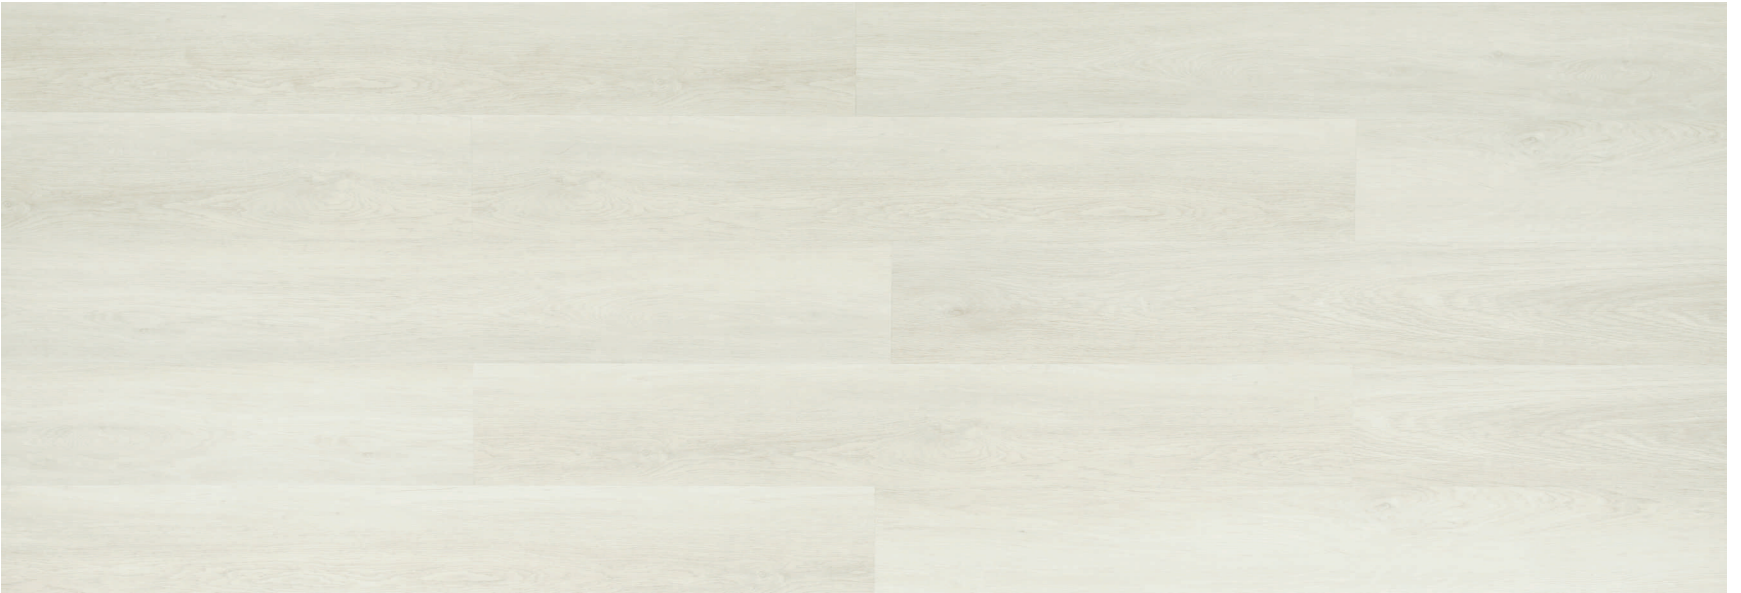

SM 900 U Tokyo



SM 911 U Osaka



SM 925 U Calgary

Note: Product woodgrain and tonality may differ from samples

- 5mm solid click with 1mm IXPE underlay (Wearlayer : 0.5 mm)



SM 933 U Toronto



SM 958 U Adelaide



SM 972 U Vienna

Note: Product woodgrain and tonality may differ from samples

* Tile 12" x 24" x 6 mm
Size: 305 x 610 x 6 mm



SM 2002 A Boston *



SM 3003 A Copenhagen *



Note: Product woodgrain and tonality may differ from samples

SM 987 U Melbourne

ANTIMICROBIAL FLOORING
HABITAT[®] PLUS
 by **CLICKPRO[®]**




Embrace Diversity



Adore Simplicity

Solid Click with factory fitted IXPE underlay. Manufactured under a management system in compliance with ISO 9001 & ISO 14001.

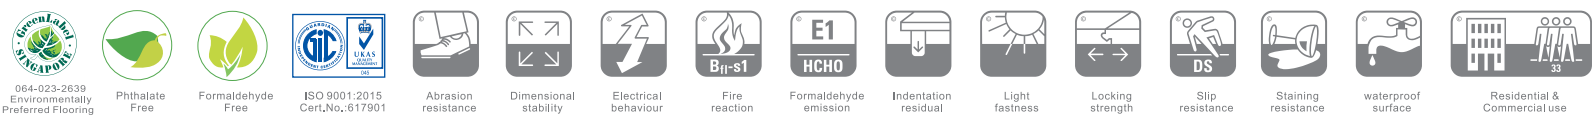

HABITAT[®] PLUS ANTIMICROBIAL COMMERCIAL CLICK

by CLICKPRO[®]

The Benefits

HABITAT PLUS is a premium solid click incorporating superior product performance. The surface is treated with 2 layers of antimicrobial coating to eliminate and prohibit the growth of bacteria and fungi. The wider than usual planks help to minimise joints for enhanced cleanliness. In addition, the special embossing exudes a natural sensation to the wood and concrete patterns. These benefits are over and above the usual performance of mass market high end resilient click.

HABITAT PLUS : The Choice For Great Interior! *Waterproof surface *Termite resistance *Slip resistance *Stain resistance *Fire retardant *Easy to maintain *Dimensionally stable *Eco-friendly *Overlay and preserve existing floor *Replaceable plank *Durable. **PLUS** features: +Antimicrobial +Commercial Wear +Double Protect +Natural Sensation +Wide Plank.

Application

HABITAT PLUS is suitable for use in high traffic residential and commercial environment. In residential, it can be fitted in the bedroom, study, living and dining area. It can also be installed in dry kitchen and entrance of bathroom by sealing the perimeter edges with silicon caulk. The flooring can also be used in commercial space where a higher level of wear performance is required. It can be readily installed over existing hard surfaces and in moisture prone area where wood flooring and glue-down products are off limit. The recommended static load limit is 1,000 pounds.

Installation & Care

Before install check list *Substrate must be structurally stable, level and smooth. *Substrate relative humidity to be <80% RH. *Flooring must be acclimatized on site 12 hours at room temperature before installing. *All carton boxes and planks must be stored completely flat on hard surface. *Install in accordance to relevant EN ISO standards.

During install check list *Leave dividing joint every 15 metres. *For wet area use, fill the perimeter gaps with a high quality silicone caulking. *All joints must be properly adjoined. *For every 5 metres room length, leave a 2mm wall gap.

Notes to end user *Do not spread excess water such that they seep into wall gaps. *Avoid exposure to long period of peak hours direct sunlight without protection of shades. *Do not drag heavy furniture across the surface. *For the use of chair with castor wheel, a protective surface pad is recommended.

Maintenance *Floors should be swept or vacuum regularly to remove loose dirt. *Damp mop as needed using clean water and a diluted PH floor cleaner. *Cleaner should be free of ammonia and hydrochloric acid. *Aging floor can be restored by machine buffing and polishing.

Product Specifications

CLASSIFICATION	STANDARDS		HABITAT [®] PLUS
Size	ISO 24342	mm	Plank : 228 x 1220 Tile : 305 x 610
Mass per unit area	ISO 23997	g/m ²	10,000
Thickness	ISO 24346	mm	6.0 (Micro-Bevelled Edge) 5.0mm Solid Click with 1.0mm IXPE underlay
Wear layer	ISO 24340	mm	0.50
Curling	ISO 23999	mm	≤ 2
Packing	-	Carton	8 planks / box (2.23 m ²) 8 tiles / box (1.49 m ²)
Dimensional stability	ISO 23999	%	< 0.20
Dimension squareness	ISO 24342	mm	0.18
Dimension straightness	ISO 24342	mm	0.07
Residual Indentation	ISO 24343 -1	mm	0.06
Effect of castor chair	ISO 4918	-	No visible damage
Abrasion resistance	EN 660 - 2	mm ³	Weargroup : T
Stain resistance	ISO 26987	-	Complied
Classification (level of use)	EN 429	Class	Heavy domestic & commercial 23/33/42
Impact sound insulation	ISO 717 - 2	dB	6
Colour fastness	ISO 105 - B02	Degree	>6
Fire classification	EN 13501-1	Class	Bfl-s1
Electrical propensity	EN 1815	kV	< 2
Cigarette burn resistance	EN 1399	Class	Class 3
Formaldehyde emission	EN 717 - 2	mg/kg	Not detected
Pentachlorophenol	EN 14041	mg/kg	Not detected
Heavy metal	EN 71 Part 3	mg/kg	Not detected
Slip resistance	SS 485 (Dry/Wet)	COF/CI	≥ 0.4 Class X
Phthalate	EN 14372 : 2004	mg/kg	Not detected
Antimicrobial activities	ISO 22196	Bacteria	>99% reduction (ATCC 4352 / 6538P / 8739 / 15442)
	ISO 846	Fungi	No growth observed (ATCC 6205 / 6275 / AS3.2942 / 3875 / 3984)

All product specifications and colouration are subject to industry manufacturing tolerances. When properly installed and cared for accordingly, **HABITAT PLUS** offers a 10 years residential limited warranty and a 3 years commercial limited warranty against manufacturing defects.