



064-023-2639  
Environmentally  
Preferred Flooring

# CLICK PRO<sup>®</sup> COLORITO



## Floor Designed For Quality And Practicality



phthalate  
free



formaldehyde  
free



easy  
maintenance



waterproof  
surface



abrasion  
resistant



underfoot  
comfort



slip  
resistant



sound  
absorption



indentation  
residual



stain  
resistant



fire  
reaction



residential &  
commercial use



termite  
retardant



antimicrobial  
surface

Made from 100% virgin PVC and EU approved non - phthalate plasticizer (DOTP)

# MATCHING FLOOR ACCESSORIES



PVC SKIRTING ( PS Series )



PVC L - PROFILE ( PL Series )



PVC T - PROFILE ( PT Series )



PVC END TRIM ( PE Series )





SJ 1608 W   Milford Oak



SJ 1512 W   Friston Oak



SJ 1518 W   Kielder Oak

Note : Miniature samples for colour illustration only

With antimicrobial protective coating



SJ 1525 W Mortimer Oak



SJ 1536 W Horsford Oak



SJ 1540 W Ettrick Beech

Note : Miniature samples for colour illustration only



SJ 1521 W Charnwood



SJ 1683 W Amrak Oak



SJ 1567 W Backmuir Walnut

Note : Miniature samples for colour illustration only

Tile : 12" x 24" x 4 mm  
Size : 305 x 610 x 4 mm



SJ 1508 T Cheshire Stone



SJ 1505 T Saintorini Stone




SJ 1503 TM Norfolk Stone

Note : Miniature samples for colour illustration only

# CLICKPRO<sup>®</sup>

## COLORITO

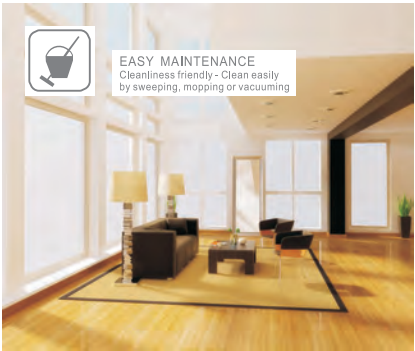

Manufactured under a management system in compliance with ISO 9001 & ISO 14001



### The Benefits

COLORITO planks and tiles are high performance floating floor made from high quality vinyl. The aesthetics of hard wood and natural stone are now combined with the resistance of pure vinyl to scratches, scuffing, stain and dirt. COLORITO surface is impervious to water and can be deployed in places that receive spills. With its slip resistance surface and underfoot resilience, you can enjoy walking on it barefoot. Being glueless, it is also eco friendly to install and contributes to improved indoor air quality. The aesthetics are unsurpassed with the natural wood emboss and non-repeat wood pattern at the two ends of each plank and tile. The surface is treated with antimicrobial protective coating. CLICKPRO LVT click offers superior impact sound insulation as compared to other click system such as SPC and laminated floors. With easy maintenance, CLICKPRO are floors for great interior.

### Application

COLORITO can be installed in the residential and light commercial environment. In residential, it can be fitted in the bedroom, study, living and dining area. It can also be installed in dry kitchen and entrance of bathroom by sealing the perimeter edges with silicon caulk. It can be readily installed over existing hard surfaces and in moisture prone area where wood flooring and glue-down products are off limit. It is well suited for childcare and education centre due to its resilience.

### Installation & Care

**Before install check list** \*Substrate must be structurally stable, flat and smooth. \*Check floor level variation is <2.0mm across any 1.2 meters. \*Check subfloor moisture level must be <85%RH. \*Floor to be acclimatized on site 12 hours at room temperature before installing. \*Height variation between ceramic tiles, plywood and any other existing flooring must be patched and levelled before laying over with new click flooring. \*For areas with rolling load and high foot traffic, thicker product thickness should be used. \*All carton boxes, planks and tiles must be stored completely flat on hard surface.

**During install check list** \*For every 5 meters room length, leave a 2mm wall gap. \*Leave an expansion gap every 10 meters. \*All joints must be properly adjoined. \*For wet area use, fill the perimeter gaps with high quality silicone caulking.

**Notes to end user** \*Do not spread excess water such that they seep into wall gaps. \*Avoid exposure to long period of peak hours direct sunlight without protection of shades. \*Do not drag heavy furniture across the surface. \*For the use of chair with castor wheel, a protective surface pad is recommended.

**Maintenance** \*Floors should be swept or vacuum regularly to remove loose dirt. \*Damp mop as needed using clean water and a PH neutral floor cleaner. Cleaner should be free of ammonia and hydrochloric acid. \*Aging floor can be restored by machine buffing and polishing.

### Product Specifications

CLASSIFICATION	STANDARDS		COLORITO
Size	EN 427	mm	Plank : 178 x 1219 mm   Tile : 305 x 610 mm
Thickness	EN 428	mm	4.0 mm ( Micro-Bevelled Edge )
Wear layer	EN 429	mm	0.30 mm
Curling	EN 434	mm	≤2 mm
Packing	-	Carton	10 planks / box ( 2.17m <sup>2</sup> )   12 tiles / box ( 2.23m <sup>2</sup> )
Dimensional stability	EN 434	%	X direction: ≤0.25 Y direction: ≤0.25
Residual Indentation	EN 433	mm	≤0.1mm
Effect of castor chair	EN 425	-	No visible damage
Abrasion resistance	EN 660	mm <sup>3</sup>	Wear Group T. Fv ≤2.0
Slip resistance	SS 485 ( Dry friction )	COF	≥0.4
	SS 485 ( Wet friction )	CI	Class X (35 to 44)
Sound insulation	ISO 10140 / ISO 717-2	dB	△Lw = 12, Ci△ = -7
Colour fastness	ISO 105 - B02	Degree	> 6
Stain resistance	EN 423	Index	Complied
Fire classification	EN 13501-1	Class	Bfl-S1 ( flame spread / smoke )
Electrical propensity	EN 1815	kV	< 2
Cigarette burn resistance	EN 1399	Class	Class 3
Classification ( level of use )	EN 429	Class	Heavy domestic (class 23 )
			General commercial (class 32 )
Formaldehyde emission	EN 717-1	mg/m <sup>2</sup>	Not detected
Heavy metal	EN 71 Part 3	mg/kg	Not detected
Pentachlorophenol	14041	mg/kg	Not detected
Phthalate	EN 14372 : 2004	mg/kg	Not detected
Antimicrobial activities	ISO 22196	Bacteria	>99% reduction ( ATCC 6538P / 8739 )
	ISO 846	Fungi	No growth observed ( ATCC 6205 / 6275 / AS3.2942 / 3875 / 3984 )

COLORITO offers a 5 years product warranty for residential wear durability. By following the installation and care, COLORITO will provide a beautiful and lasting floor for many years to come.