



064-023-2639
Environmentally Preferred Flooring

HABITAT[®]

by CLICKPRO[®]



Flooring Inspired By Nature

Manufactured under a management system in compliance with ISO 9001 & ISO 14001



phthalate free



formaldehyde free



easy maintenance



waterproof surface



abrasion resistant



underfoot comfort



slip resistant



indentation residual



stain resistant



fire reaction



residential & commercial use



termite retardant



antimicrobial surface

Important Notes : Please read and adhere to the Installation & Care checklist printed at the back page

MATCHING FLOOR ACCESSORIES



PVC SKIRTING (PS Series)



PVC T - PROFILE (PT Series)



PVC END TRIM (PE Series)



PVC L - PROFILE
(PL Series)





HT 6211 W Canadian Ash



HT 6229 W Fraxinus



HT 6238 W Spanish Oak



HT 6223 W European Oak



HT 6245 W American Ash



HT 6256 W Japanese Oak



HT 6230 W French Rovere



HT 6255 W Cherrybark Oak



HT 6268 W Peruvian Walnut



HT 6813 T Caliche




HT 6825 T Phyllite



HABITAT[®]

by **CLICKPRO[®]**

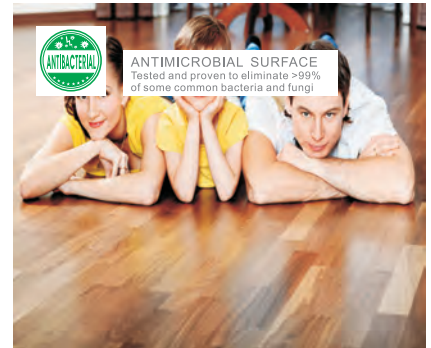

Solid Click with factory fitted IXPE underlay for a healthier indoor air quality

The Benefits

HABITAT is a solid click incorporating superior product performance. The aesthetics of hard wood and natural stone are now combined with the resistance of pure vinyl to scratches, scuffing, stain and dirt. The resistance surface is impervious to water and can be deployed in places that receive spills. With its slip resistance surface and underfoot resilience, you can enjoy walking on it barefoot. Being glueless, it is also eco friendly to install and contributes to improved indoor air quality. The surface is treated with antimicrobial protective coating. With easy maintenance, HABITAT are floors for great interior.

Application

HABITAT can be installed in the residential and light commercial environment. In residential, it can be fitted in the bedroom, study, living and dining area. It can also be installed in dry kitchen and entrance of bathroom by sealing the perimeter edges with silicon caulk. It can be readily installed over existing hard surfaces, and thus eliminating the need for hacking and removal of existing flooring. It is also recommended for use in light commercial with no rolling load and high foot traffic.

Installation & Care

Before install check list *Substrate must be structurally stable, flat and smooth. *Check floor level variation is <2.0mm across any 1.2 metre. *Check subfloor moisture level must be <80% RH. *Floor to be acclimatized on site 12 hours at room temperature before installing. *Height variation between ceramic tiles, plywood and any other existing flooring must be patched and levelled before laying over with new click flooring. *For areas with rolling load and high foot traffic, thicker product thickness should be used. *All carton boxes, planks and tiles must be stored completely flat on hard surface.

During install check list *For every 5 metres room length, leave a 3mm wall gap. *Leave an expansion gap every 10 metres. *All joints must be properly adjoined. *For wet area use, fill the perimeter gaps with a high quality silicone caulking.

Notes to end user *Do not spread excess water such that they seep into wall gaps. *Avoid exposure to long period of peak hours direct sunlight without protection of shades. *Do not drag heavy furniture across the surface. *For the use of chair with castor wheel, a protective surface pad is recommended.

Maintenance *Floors should be swept or vacuum regularly to remove loose dirt. *Damp mop as needed using clean water and a PH neutral floor cleaner. Cleaner should be free of ammonia and hydrochloric acid. *Aging floor can be restored by machine buffing and polishing.

Product Specifications

CLASSIFICATION	STANDARDS		HABITAT [®]
Size	ISO 24342	mm	Plank : 180 x 1220 mm Tile : 305 x 610 mm
Thickness	ISO 24346	mm	5.0 mm (Micro-Bevelled Edge) 4.0 mm Solid Click with 1.0 mm IXPE underlay
Wear layer	ISO 24340	mm	0.30 mm
Curling	ISO 23999	mm	≤2 mm
Packing	-	Carton	8 planks / box (1.76 m ²) 9 tiles / box (1.68 m ²)
Dimensional stability	ISO 23999	%	< 0.20
Dimension squareness	ISO 24342	mm	0.18 mm
Dimension straightness	ISO 24342	mm	0.07 mm
Residual Indentation	ISO 24343 -1	mm	0.06 mm
Effect of castor chair	ISO 4918	-	No visible damage
Abrasion resistance	EN 660 - 2	mm ³	Weargroup : T
Stain resistance	ISO 26987	Index	Complied
Classification (level of use)	EN 429	Class	Heavy domestic & Light commercial 23/33/42
Impact sound insulation	ISO 717 - 2	dB	6
Colour fastness	ISO 105 - B02	Degree	>6
Fire classification	EN 13501-1	Class	Bfl-s1 (flame spread / smoke)
Electrical propensity	EN 1815	kV	< 2
Cigarette burn resistance	EN 1399	Class	Class 3
Formaldehyde emission	EN 717 - 2	mg/kg	Not detected
Pentachlorophenol	EN 14041	mg/kg	Not detected
Heavy metal	EN 71 Part 3	mg/kg	Not detected
Slip resistance	SS 485 (Dry/Wet)	COF/CI	≥0.4 Class X
Phthalate	EN 14372 : 2004	mg/kg	Not detected
Antimicrobial activities	ISO 22196 ISO 846	Bacteria Fungi	>99% reduction (ATCC 4352 / 6538P / 8739 / 15442) No growth observed (ATCC 6205 / 6275 / AS3.2942 / 3875 / 3984)

All product specifications and colouration are subject to industry manufacturing tolerances. When properly installed and cared for accordingly, HABITAT offers a 5 years product warranty for residential wear durability. By following the installation and care, HABITAT will provide a beautiful and lasting floor for many years to come.